



NDAA
COMPLIANT PRODUCTS

4K
ULTRA HD

30fps

4K

Resolution



Universal HD / Analog



Star-Light Plus™



2.8mm
Fixed Lens



IP67 Rated



5YEAR

Warranty

Dimensions

Unit: Inch (mm)

UNIVERSAL
HD COAX

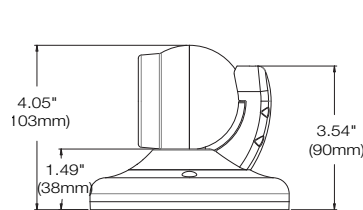

Summary

Featuring Star-Light Plus™ color in near-total darkness, the 4K Universal HD over Coax® cameras are NDAA/TAA compliant, delivering crystal-clear images and support HD-Analog, HD-TVI, HD-CVI and all legacy analog signal. The weather-resistant turret cameras are IP67 rated, eliminate IR reflections, and can be controlled via the same coax cable using UTC. All Star-Light Plus™ 4K cameras are engineered to work with our VMAX® A1 4K™ DVRs using your existing coax infrastructure for a cost-effective, high resolution surveillance solution.

Features

- Universal HD over Coax® technology with HD-Analog, HD-TVI, HD-CVI and all legacy analog signal support
- Star-Light Plus™ color in near-total darkness technology
- 1/1.8" image sensor
- 4K at 15fps, 4MP or 2.1MP/1080p at real-time 30fps
- 2.8mm fixed lens
- True wide dynamic range (WDR)
- OSD control via coaxial (UTC)
- Turret housing reduces IR reflection with true 90° tilting and 360° rotation
- 70' Smart IR™ with intelligent camera sync.
- Smart DNR™ 3D digital noise reduction
- True day/night mechanical IR cut filter
- De-Fog™ extreme weather image compensation
- Easy icon driven OSD menu with built-in joystick
- Programmable privacy zones
- Auto gain control (AGC)
- Backlight compensation (BLC)
- Auto white balance (AWB)
- UL listed
- NDAA compliant
- IP67 dust-tight and waterproof to 3 feet
- IK 10-rated impact-resistant
- 5 year warranty

Accessories (Optional)



DWC-VACM
Ceiling mount bracket



DWC-VAWM
Wall mount bracket



DWC-VAJUNC
Junction box

Specifications



IMAGE	
Image sensor	4K 1/1.8" CMOS
Active pixels	3864 (H) x 2176 (V)
Scanning system	Progressive scan
Frequency	60Hz/50Hz
Signal technology	Universal HD over Coax® technology with HD-Analog, HD-TVI, HD-CVI to 4K and CVBS
Synchronization	Internal
Resolution	Max 3840 x 2160
Minimum scene illumination	0.1 lux (color) 0 lux (B/W)
Video output	4K @ 15fps 4MP/1440p @ 30fps 2.1MP/1080p @ 30fps
LENS	
Focal length	2.8mm
Lens type	Fixed lens
Field of view (FoV)	106.5°
IR distance	70ft range
OPERATIONAL	
Shutter mode	Auto
Shutter speed	1/30-1/30,000
Backlight compensation (BLC)	Yes
Star-Light™ (sense-up)	Off-x32 (not available at 4K)
Wide Dynamic Range (WDR)	Double shutter true WDR
Wide dynamic Range (WDR) dB	120dB
Smart DNR™ 3D digital noise reduction	3D/2D DNR
White balance	Yes
Highlight masking exposure (HME)	Yes
Dynamic range compression (DRC)	Yes
Day/night	Auto, day (color), night (B/W)
Mirror/flip	Yes
Auto gain control	Max 60dB
Motion detection	Yes
Privacy zones	Yes
Sharpness	Yes
Gamma	0.45
De-fog	Yes
RS485/UTP built-in	UTC
ENVIRONMENTAL	
Operating temperature	-4°F - 122°F (-20°C - 50°C)
Operating humidity	10-90% RH (non-condensing)
IP rating	IP67-rated
IK rating	IK10-rated impact resistant
Other certifications	UL listed, FCC, CE, ROHS
ELECTRICAL	
Power requirements	DC12V
Power consumption	DC12V (LED off): 3W, 250mA DC12V (LED on): 4.54W, 378mA
MECHANICAL	
Material	Aluminum turret housing
Dimensions	4.92" x 4.05" (125 x 103 mm)
Weight	1.16lbs (0.53kg)
Warranty	5 year warranty



Increase sales and profitability. Sign up and become a DW Channel Partner today!



☎ : 866.446.3595



✉ : sales@digital-watchdog.com



🌐 : www.digital-watchdog.com

